




**Corian.**  
CHARGING SURFACE

# DUPONT™ CORIAN® CHARGING UNIT

## 15W Qi + PMA Dual-Mode Wireless Power Transmitter

### DESCRIPTION

The DuPont™ Corian® Charging Unit - Individual is a complete, self-contained system. It contains a custom dual mode controller for managing the Qi or PMA protocol and charging functions.



The unit will automatically adjust the charging power, based on the feedback command from the receiver. When a Qi or PMA compliant receiver is placed on the transmitter coil, the unit will deploy up to 15W depending on the charging capabilities of the receiver or adaptor. For example, a typical handheld device requires 5W; therefore the transmitter will deploy 5W.

### APPLICATIONS

Wireless charging of Qi and PMA compliant devices:

- Cell Phones and Smartphones
- MP3 Players
- GPS Devices
- Digital Cameras
- Tablets and eReaders
- Lighting
- Toys

**An adaptor is required for devices that do not have an integrated PMA or Qi receiver.**

### FEATURES

- Qi-compliant wireless transmitter
- PMA-compliant wireless transmitter
- LED indicators for power on, charging and error conditions
- Designed for subsurface mounting with DuPont™ Corian® and Zodiaq® for integrated technology.

### DEVICE OPERATION

When a compliant receiver is placed on the transmitter coil, the unit will automatically adjust the charging power, based on the feedback command from the receiver. When charging, the LED will illuminate green for ~2 seconds, and then start flashing green to indicate charging is taking place. If the receiver coil moves too far in relation to the transmitter coil, the LED may illuminate solid red, indicating an error condition. If this (or any other error condition) occurs, remove the receiver from the transmitter, wait for the LED to turn off, and then replace the receiver on the transmitter.

Status	Indicator
Off	No power/inactive
Power on	One green flash
Charging	Continuous flashing green
End-of-charge	Solid green
Foreign object detected	Flashing red
Error condition	Solid red


### FOREIGN OBJECT DETECTION

The DuPont™ Corian® Charging Unit - Individual contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red if the object interferes with the system.

# DUPONT™ CORIAN® CHARGING UNIT

## 15W QI + PMA DUAL-MODE WIRELESS POWER TRANSMITTER

### MECHANICAL DIMENSIONS

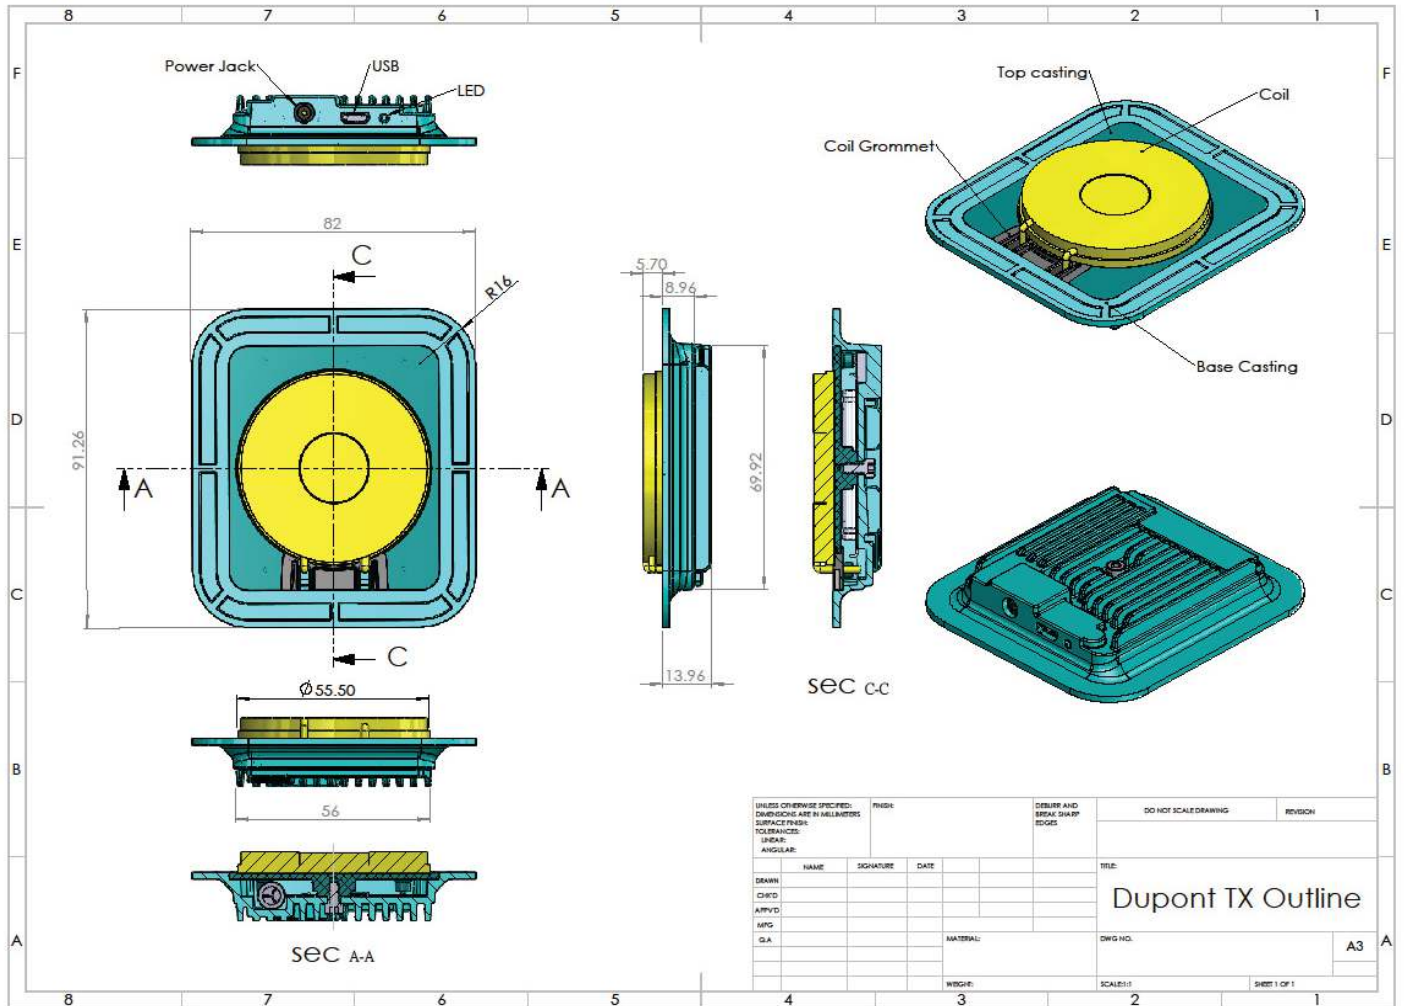

### ELECTRICAL AND MECHANICAL SPECIFICATIONS

Dimension	Description
Length	3.6" (91mm)
Width	3.2" (82mm)
Recommended material thickness between the top of the coil and the top surface	Corian® 8mm, Zodiaq® 10mm A pocket will need to be milled to specified thickness. Zodiaq® will need additional milling to accommodate the flange.

Connection	Description
DC Input	19V, 1.35A
Micro USB	Port for firmware updates
LED	Indicates charging (green flashing), end-of-charge (green solid), foreign object detect (red flashing), or error condition (red solid)

### TEMPERATURE

Operating Ambient, normal mode ambient:	32°F min / 86°F max. (0°C min / 30°C max.)
Non-operating Ambient:	-40°F to 158°F (-40°C to +70°C) (Maximum rate of change of 36°F (20°C)/hour)

### HUMIDITY

Operating:	To 85% relative humidity (non-condensing)
Non-Operating:	To 95% relative humidity (non-condensing)

### ALTITUDE

Operating:	to 10,000 feet
Non-operating:	to 50,000 feet



## DUPONT™ CORIAN® CHARGING UNIT 15W Qi + PMA DUAL-MODE WIRELESS POWER TRANSMITTER

### WARRANTY

The DuPont™ Corian® Charging Unit – Individual is covered by a one-year limited consumer warranty that provides product replacement only. Please visit [corian.com/cs-warranty](http://corian.com/cs-warranty) for more information.

### PRODUCT REGULATORY REQUIREMENTS

**Intended Application** – This product is intended for indoor use

### PRODUCT SAFETY

IEC60950-1 (International)

### WIRELESS STANDARDS COMPLIANCE

Qi Interoperability Test Specification v1.3 -  
Interoperability ID: IDD11150475T

### PRODUCT EMC COMPLIANCE – CLASS B COMPLIANCE

**NOTE:** The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

FCC /ICES-003 - Emissions (USA/Canada) Verification

CISPR 22 – Emissions (International)

EN55022 - Emissions (Europe)

EN55024 - Immunity (Europe)

- EN61000-4-2 Electrostatic Discharge
- EN61000-4-3 Radiated RFI Immunity
- EN61000-4-4 Electrical Fast Transients
- EN61000-4-5 Electrical Surge
- EN61000-4-6 RF Conducted
- EN61000-4-8 Power Frequency Magnetic Fields
- EN61000-4-11 Voltage Dips and Interruptions

EN61000-3-2 - Harmonics (Europe)

EN61000-3-3 - Voltage Flicker (Europe)

CE – EMC Directive 89/336/EEC (Europe)

Certifications / Registrations / Declarations

UL Certification (US/Canada)

FCC/ICES-003 Class C Attestation (USA/Canada)

CE Declaration of Conformity (CENELEC Europe)

### Legal Notices

*Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. "Typical" parameters which may be provided in Neosen Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. NEOSEN ENERGY MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Should the Buyer purchase or use Neosen Energy products for any such unintended or unauthorized application, the Buyer shall indemnify and hold Neosen Energy, and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Neosen Energy was negligent regarding the design or manufacture of the part. No licenses are conveyed, implicitly or otherwise, under any Neosen Energy intellectual property rights.*

Copyright© 2015 E.I. du Pont de Nemours and Company. The DuPont Oval Logo, DuPont™ and Corian® are trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

Neosen is a trademark of Neosen Energy, LLC. 12/15 K-28312